


MASTER PVC LF M

Ref 007578

Medium Duty Flexible PVC hose and ducting manufactured from soft grey PVC, reinforced with

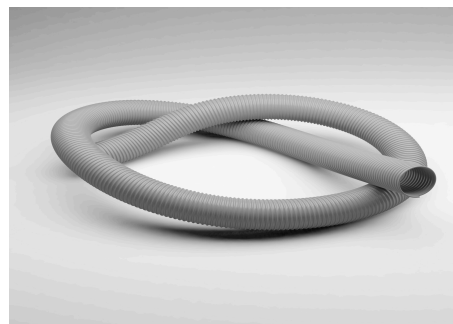

Flame-retardant

Compressible

Very flexible

Moderately pressure resistant

0 to +70 °C

CONSTRUCTION & MATERIALS

- Construction: film hose with embedded support coil
- Spiral Design: plastic coated
- Material of the spiral: spring steel
- Wall material: soft PVC
- Specifications of the wall: flame retardant

PROPERTIES

- Mechanical: small bending radius
- Flexibility: very flexible
- Pressure: moderately pressure resistant
- Colour: grey

TEMPERATURE

- Operating range: 0 to 70 °C
- Short-term peak: peaks to 85 °C

APPLICATIONS & INDUSTRIES

- Applications: Automotive / Wood

VARIANT SPECIFICATIONS

14 sizes · DN 25 to 152 mm

Article no.	DN (mm)	Outer Ø (mm)	Bend radius (mm)	Weight (kg/m)	Working press. (bar)	Vacuum (bar)
007578:25:x	25	31	14	0.15	1.70	0.20
007578:32:x	32	38	18	0.15	1.50	0.20
007578:38:x	38	44	22	0.25	1.40	0.20
007578:45:x	45	51	25	0.32	1.30	0.18
007578:51:x	51	57	28	0.35	1.30	0.15
007578:57:x	57	63	30	0.41	1.20	0.14
007578:63:x	63	69	34	0.45	1.00	0.14
007578:76:x	76	82	40	0.60	0.80	0.10
007578:80:x	80	86	42	0.62	0.70	0.09
007578:89:x	89	95	48	0.65	0.70	0.09
007578:102:x	102	108	52	0.75	0.60	0.08
007578:115:x	115	121	60	0.80	0.50	0.07
007578:127:x	127	133	66	0.90	0.40	0.06
007578:152:x	152	158	80	1.10	0.30	0.05

Lengths. Supplied in standard stock lengths – see flex-appeal.co.uk for available sizes.